
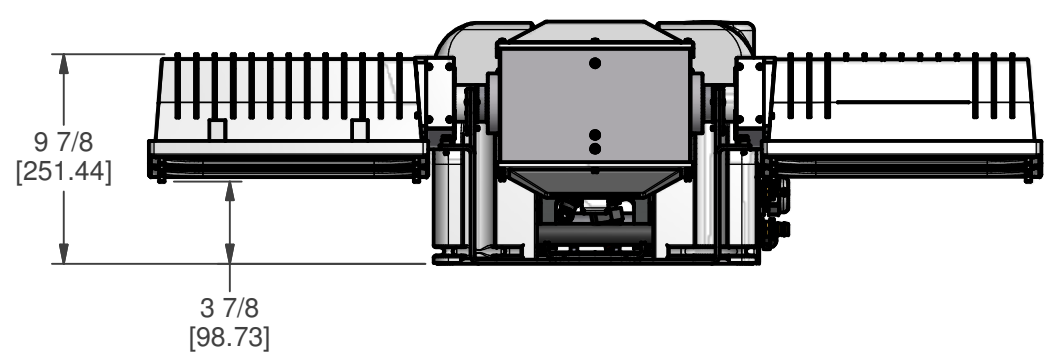
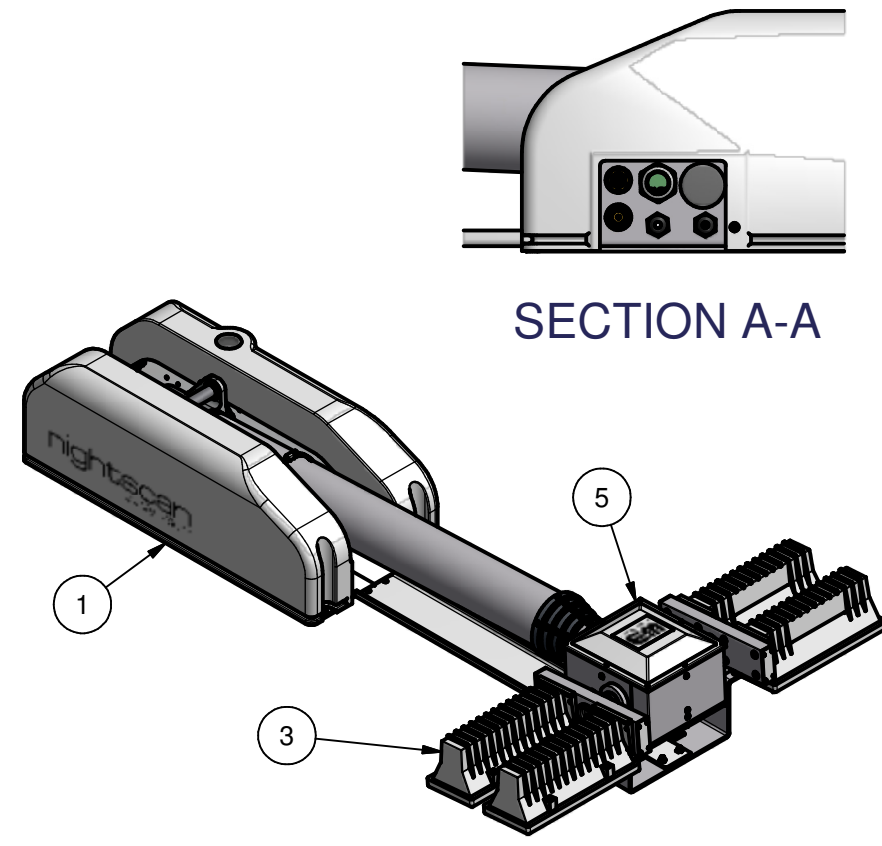



| REVISION HISTORY | | | | |
|------------------|-----|-----------------|-----------|----------|
| ECN | REV | DESCRIPTION | DATE | APPROVED |
| 11123 | N | INITIAL DRAWING | 7/19/2012 | DAS |

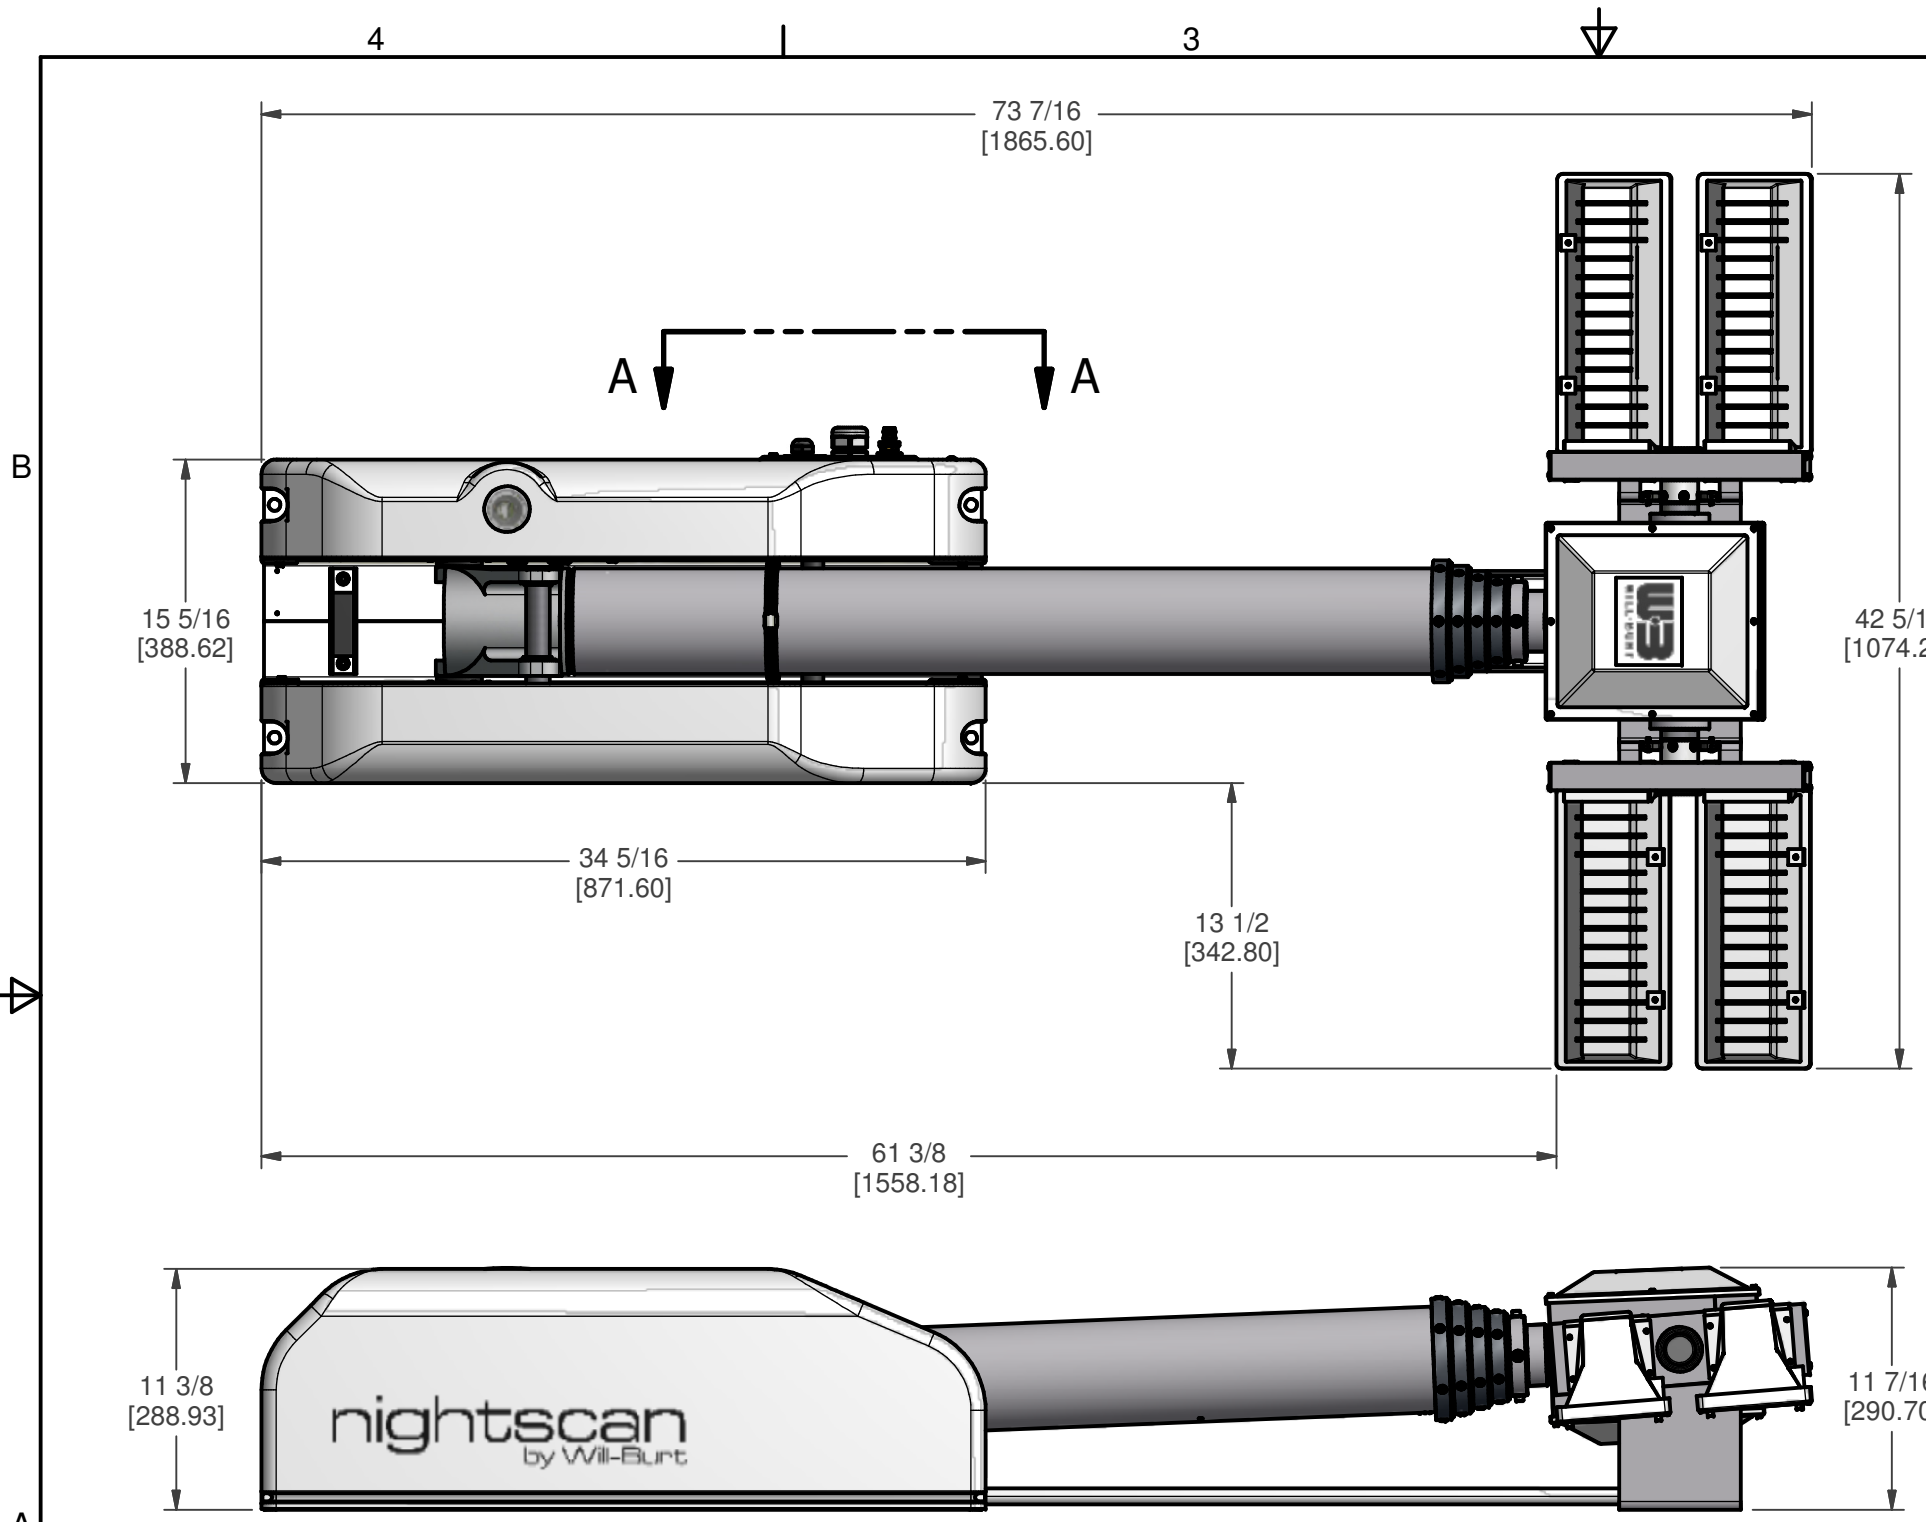

NOTE:
SECONDARY DIMENSIONS - MILLIMETERS NOTED IN BRACKETS

| | | | | | |
|-------------------------|---|---|------------------|---|--------------|
| MATERIAL | UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES. TOLERANCES ON: DIMENSIONS ±0.005 ANGLES ±1° 1. ALL ANGLES 90° 2. ALL INSIDE EDGES TO HAVE .005" TO .035" FILLETS. 3. ALL OUTSIDE EDGES TO HAVE .005" TO .015" CHAMFER OR RADIUS. ¹²⁵ √ ON ALL MACHINED SURFACES | PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF THE WILL-BURT COMPANY ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF THE WILL-BURT COMPANY IS PROHIBITED. | | W3 AN EMPLOYEE OWNED COMPANY WILL-BURT ORRVILLE, OH | |
| FINISH | | | | APPROVALS | DATE |
| APPROX. WT:155.1 lbmass | | THIRD ANGLE PROJECTION | DRAWN dasmith | 7/19/2012 | B |
| | | CHECKED | | PN: | 721518010 |
| | | | | | SHEET 1 OF 2 |

**BOTTOM VIEW
MOUNTING BOLT PATTERN**

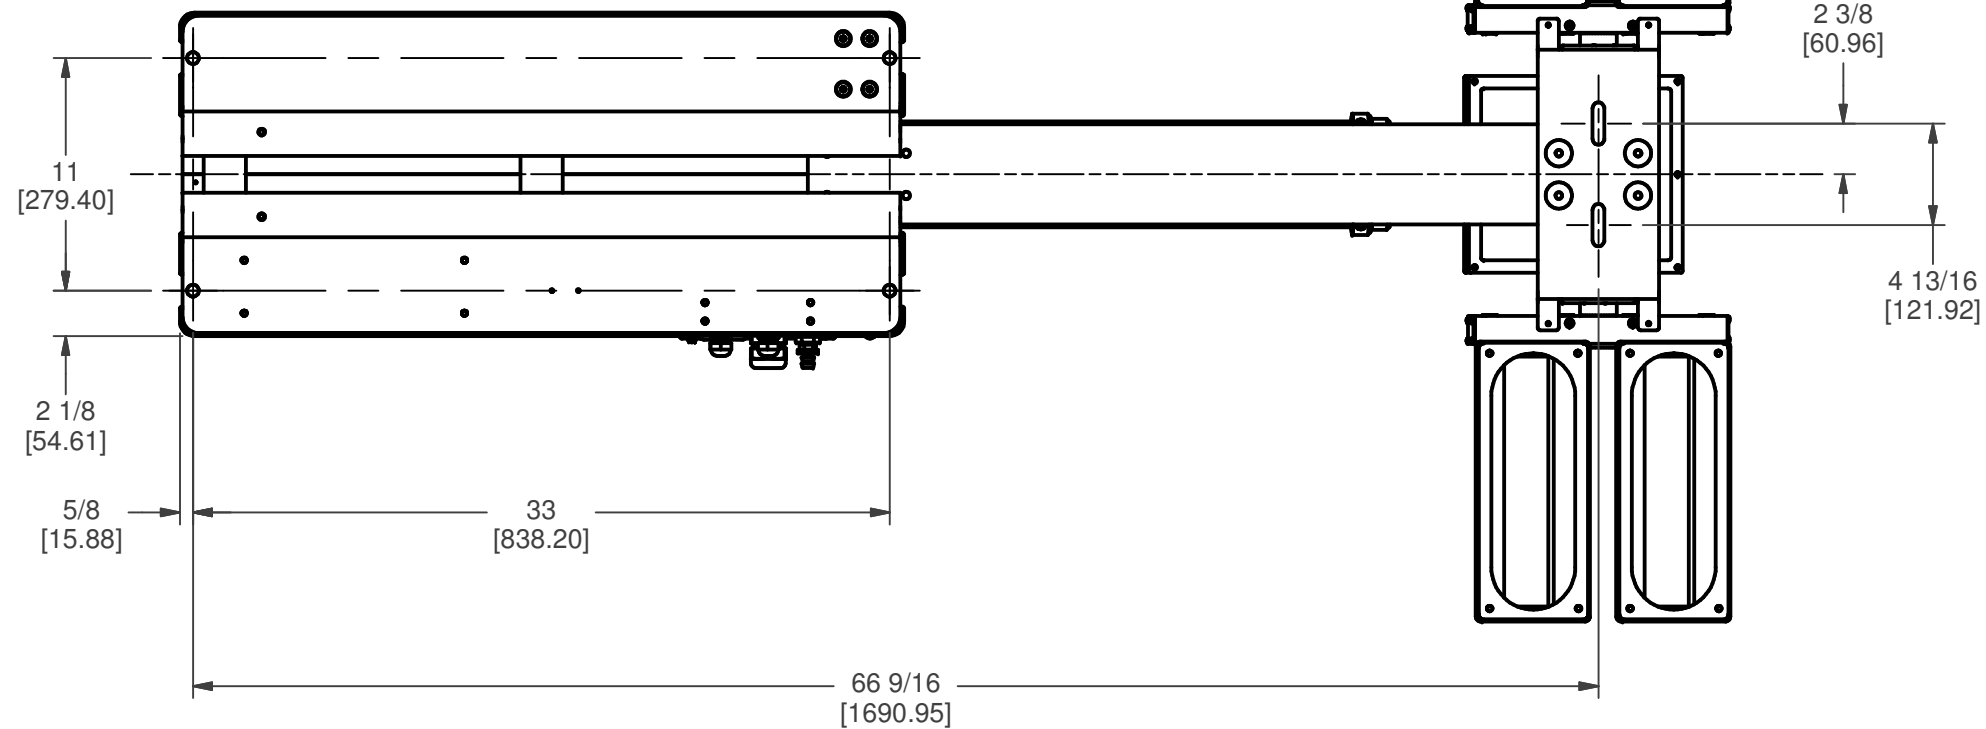

NOTE:

- 1 APPLY RTV #739 OR EQUAL TO ALL OPEN HOLES
- 2 SEE WIRING DIAGRAM WD-46276 FOR WIRING DETAILS
- 3 SET LIGHT BARS HOME POSITION PARALLEL TO BASE PLATE WHEN STOWED
- 4 APPLY LOCTITE #242 OR EQUAL TO ALL THREADS UNLESS OTHERWISE NOTED
- 5 APPLY A COAT OF SILICONE GREASE TO RCP MOTOR BORES PRIOR TO SHAFTS BEING INSTALLED

| BOM | | | |
|------|-----|-------------|--|
| ITEM | QTY | PART NUMBER | DESCRIPTION |
| 1 | 1 | 4627601 | BASE ASSEMBLY NSP |
| 2 | 1 | 4807801 | KIT, SHIPPING NSP (NOT SHOWN) |
| 3 | 1 | 4590901 | MGN 4 LIGHT, 3600W (4-900W 220VAC) WHT |
| 4 | 1 | 4706701 | NSP LABEL KIT (NOT SHOWN) |
| 5 | 1 | 4742501 | RCP ASSEMBLY NSP STD |

| | | | | | |
|-------------------------|---|---|-------------------|---|---------------------|
| MATERIAL | UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES. TOLERANCES ON: DIMENSIONS ±0.005 ANGLES ±1° 1. ALL ANGLES 90° 2. ALL INSIDE EDGES TO HAVE .005" TO .035" FILLETS. 3. ALL OUTSIDE EDGES TO HAVE .005" TO .015" CHAMFER OR RADIUS. 125° ON ALL MACHINED SURFACES | PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF THE WILL-BURT COMPANY ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF THE WILL-BURT COMPANY IS PROHIBITED. | | AN EMPLOYEE OWNED COMPANY ORRVILLE, OH | |
| FINISH | | APPROVALS DRAWN: dasmith CHECKED: | DATE 7/19/2012 | SIZE B | DWG NO 721518010 |
| APPROX. WT:155.1 lbmass | | | | PN: 721518010 | SHEET 2 OF 2 |
| THIRD ANGLE PROJECTION | | | | | |