

FT-SL-15

FT-SL-15

POLE MOUNTED LED SCENE LIGHT


ABOUT THE FT-SL-15

The FT-SL-15 LED Scene light is designed to be the most reliable LED scene light ever produced. This fixture has its roots in the extremely harsh global mining industry and has been adapted for use in the Fire service. It produces measurable light output comparable to scene lights advertised in the Fire Industry as 20,000 lumens while consuming a fraction of the power (150W total). The combination of a die-cast 6061 aluminum housing, unbreakable polycarbonate lens, integrated deutsch connector, reinforced gasketed bezel and a strengthened trunnion bracket create a one of a kind, high-powered light that will outshine and outlast the competition.



Key Features:

- Industry Standard 3/4" NPT Mount
- Designed for 60 GRMS Vibration
- AC or DC Configuration
- Anti-Corrosive Coating
- 7 Watt Cree XP-L LEDs
- CE Certified

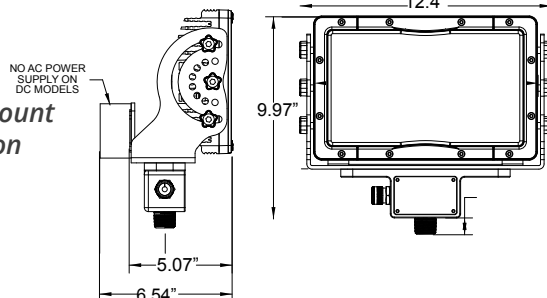

FT-SL-15 SPECS

RAW LUMENS	20,000
EFFECTIVE LUMENS	11,888
WATTAGE	150W
AMPERAGE	12.5 A @ 12V DC / 1.25 @ 120V AC
INPUT VOLTAGE	11-65V DC OR 90-277V AC

Model #	Description	Raw Lumens	Effective Lumens	Wattage	Voltage Range	Amp. Draw	Beam Pattern	Dimensions	Weight
FT-SL-15-S-B	20,000 lumen work light. 10 degree spot optic configuration. Black housing.	20,000	11,888	150W	11-65V DC	12.5A @ 12VDC	Spot	12.4" X 9.97" X 5.07"	19.45 lbs.
FT-SL-15-S-W	20,000 lumen work light. 10 degree spot optic configuration. White housing.	20,000	11,888	150W	11-65V DC	12.5A @ 12VDC	Spot	12.4" X 9.97" X 5.07"	19.45 lbs.
FT-SL-15-F-B	20,000 lumen work light. 60 degree flood optic configuration. Black housing.	20,000	11,888	150W	11-65V DC	12.5A @ 12VDC	Flood	12.4" X 9.97" X 5.07"	19.45 lbs.
FT-SL-15-F-W	20,000 lumen work light. 60 degree flood optic configuration. White housing.	20,000	11,888	150W	11-65V DC	12.5A @ 12VDC	Flood	12.4" X 9.97" X 5.07"	19.45 lbs.
FT-SL-15-FT-B	20,000 lumen work light. 10 and 60 degree spot and flood optic configuration. Black housing.	20,000	11,888	150W	11-65V DC	12.5A @ 12VDC	Combo	12.4" X 9.97" X 5.07"	19.45 lbs.
FT-SL-15-FT-W	20,000 lumen work light. 10 and 60 degree spot and flood optic configuration. White housing.	20,000	11,888	150W	11-65V DC	1.25A @ 120V AC	Combo	12.4" X 9.97" X 5.07"	19.45 lbs.

FT-SL-15

Model #	Description	Raw Lumens	Effective Lumens	Wattage	Voltage Range	Amp. Draw	Beam Pattern	Dimensions	Weight
FT-SL-15-S-110-B	20,000 lumen work light. 10 degree spot optic configuration. Black housing.	20,000	11,888	150W	90-277V AC	1.25A @ 120V AC	Spot	12.4" X 9.97" X 6.54"	22 lbs.
FT-SL-15-S-110-W	20,000 lumen work light. 10 degree spot optic configuration. White housing.	20,000	11,888	150W	90-277V AC	1.25A @ 120V AC	Spot	12.4" X 9.97" X 6.54"	22 lbs.
FT-SL-15-F-110-B	20,000 lumen work light. 60 degree flood optic configuration. Black housing.	20,000	11,888	150W	90-277V AC	1.25A @ 120V AC	Flood	12.4" X 9.97" X 6.54"	22 lbs.
FT-SL-15-F-110-W	20,000 lumen work light. 60 degree flood optic configuration. White housing.	20,000	11,888	150W	90-277V AC	1.25A @ 120V AC	Flood	12.4" X 9.97" X 6.54"	22 lbs.
FT-SL-15-FT-110-B	20,000 lumen work light. 10 and 60 degree spot and flood optic configuration. Black housing.	20,000	11,888	150W	90-277V AC	1.25A @ 120V AC	Combo	12.4" X 9.97" X 6.54"	22 lbs.
FT-SL-15-FT-110-W	20,000 lumen work light. 10 and 60 degree spot and flood optic configuration. White housing.	20,000	11,888	150W	90-277V AC	1.25A @ 120V AC	Combo	12.4" X 9.97" X 6.54"	22 lbs.

FT-SL-GSM

Guardian

Pole Mounted Scene Light



ABOUT THE GUARDIAN POLE LIGHT

The all new FireTech Guardian Pole Mounted Scene Light brings the next-generation optic and LED technology from the Guardian and Guardian Elite into the pole-mounted world, offering a more traditional look/feel with all of the electronics neatly tucked away inside the housing. The SL-GSM Pole Mounted Scene Light is available in 10,000 lumen equivalent light output, as well as an earth-shattering 20,000 equivalent lumen configuration for times when you simply cant be left to get the job done in the dark.

Key Features:

- *Ultra Compact Design*
- *AC or DC Versions Available*
- *"Down and Out" Beam Pattern*
- *Opt. Internal Power Supply*



THE GUARDIAN POLE LIGHT

GUARDIAN POLE SPECS

EQUIVALENT LUMENS	10,000
EFFECTIVE LUMENS	6,500
WATTAGE	75W
AMPERAGE	5.83A @ 12V DC
INPUT VOLTAGE	9-32V DC / 90-277V AC

GUARDIAN ELITE POLE SPECS

EQUIVALENT LUMENS	20,000
EFFECTIVE LUMENS	12,290
WATTAGE	125W
AMPERAGE	10.41A @ 12V DC
INPUT VOLTAGE	9-32V DC / 90-277V AC

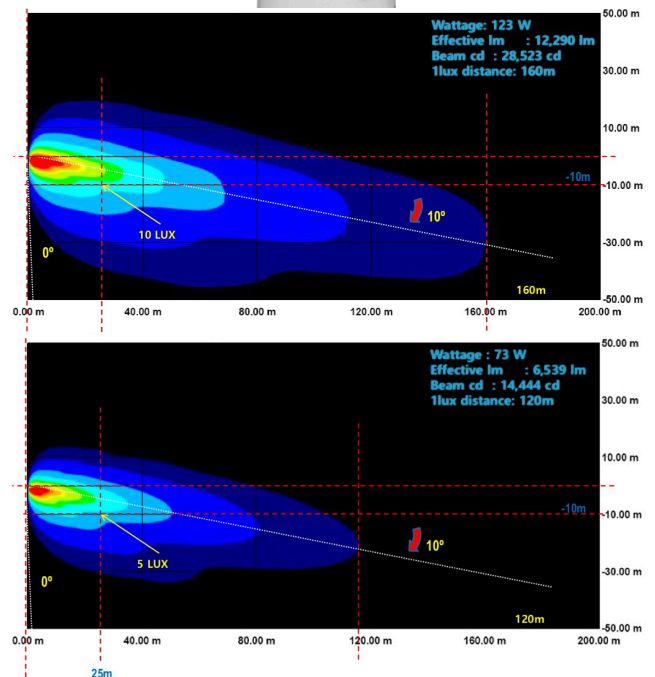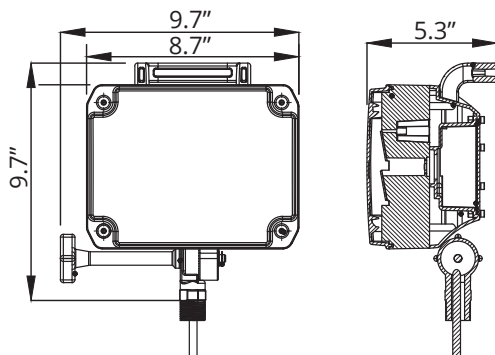

FT-SL-GSM

Model #	Description	Equivalent Lumens	Effective Lumens	Wattage	Amperage	Voltage Range	Switch
FT-SL-GSM-B	Pole Mount Guardian Scene Light. 6,500 effective lumens (10,000 equivalent lumens). 9-32v DC. 75 watts. Black housing. (Pole not included)	10,000 lm	6,500 lm	75w	6.25@ 12v DC	9-32v DC	No
FT-SL-GSM-SW-B	Pole Mount Guardian Scene Light. 6,500 effective lumens (10,000 equivalent lumens). 9-32v DC. 75 watts. Switch. Black housing. (Pole not included)	10,000 lm	6,500 lm	75w	6.25@ 12v DC	9-32v DC	Yes
FT-SL-GSM-W	Pole Mount Guardian Scene Light. 6,500 effective lumens (10,000 equivalent lumens). 9-32v DC. 75 watts. White housing. (Pole not included)	10,000 lm	6,500 lm	75w	6.25@ 12v DC	9-32v DC	No
FT-SL-GSM-SW-W	Pole Mount Guardian Scene Light. 6,500 effective lumens (10,000 equivalent lumens). 9-32v DC. 75 watts. Switch. White housing. (Pole not included)	10,000 lm	6,500 lm	75w	6.25@ 12v DC	9-32v DC	Yes
FT-SL-GESM-B	Pole Mount Guardian Elite Scene Light. 12500 effective lumens (20,000 equivalent lumens). 9-32v DC. 125 watts. Black housing. (Pole not included)	10,000 lm	6,500 lm	75w	6.25@ 12v DC	9-32v DC	No
FT-SL-GESM-SW-B	Pole Mount Guardian Elite Scene Light. 12500 effective lumens (20,000 equivalent lumens). 9-32v DC. 125 watts. Switch. Black housing. (Pole not included)	20,000 lm	12,500 lm	125W	6.25@ 12v DC	9-32v DC	Yes
FT-SL-GESM-W	Pole Mount Guardian Elite Scene Light. 12500 effective lumens (20,000 equivalent lumens). 9-32v DC. 125 watts. White housing. (Pole not included)	20,000 lm	12,500 lm	125W	6.25@ 12v DC	9-32v DC	No
FT-SL-GESM-SW-W	Pole Mount Guardian Elite Scene Light. 12500 effective lumens (20,000 equivalent lumens). 9-32v DC. 125 watts. Switch. White housing. (Pole not included)	20,000 lm	12,500 lm	125W	6.25@ 12v DC	9-32v DC	Yes
FT-SL-GSM-110-B	Pole Mount Guardian Scene Light. 6,500 effective lumens (10,000 equivalent lumens). 110v AC. 75 watts. Black housing. (Pole not included)	10,000 lm	6,500 lm	75w	0.625A @ 120v AC	90-277v AC	No
FT-SL-GSM-110-SW-B	Pole Mount Guardian Scene Light. 6,500 effective lumens (10,000 equivalent lumens). 110v AC. 75 watts. Switch. Black housing. (Pole not included)	10,000 lm	6,500 lm	75w	0.625A @ 120v AC	90-277v AC	Yes
FT-SL-GSM-110-W	Pole Mount Guardian Scene Light. 6,500 effective lumens (10,000 equivalent lumens). 110v AC. 75 watts. White housing. (Pole not included)	10,000 lm	6,500 lm	75w	0.625A @ 120v AC	90-277v AC	No
FT-SL-GSM-110-SW-W	Pole Mount Guardian Scene Light. 6,500 effective lumens (10,000 equivalent lumens). 110v AC. 75 watts. Switch. White housing. (Pole not included)	10,000 lm	6,500 lm	75w	0.625A @ 120v AC	90-277v AC	Yes
FT-SL-GESM-110-B	Pole Mount Guardian Elite Scene Light. 12500 effective lumens (20,000 equivalent lumens). 110v AC. 125 watts. Black housing. (Pole not included)	20,000 lm	12,500 lm	125W	0.625A @ 120v AC	90-277v AC	No
FT-SL-GESM-110-SW-B	Pole Mount Guardian Elite Scene Light. 12500 effective lumens (20,000 equivalent lumens). 110v AC. 125 watts. Switch. Black housing. (Pole not included)	20,000 lm	12,500 lm	125W	0.625A @ 120v AC	90-277v AC	Yes
FT-SL-GESM-110-W	Pole Mount Guardian Elite Scene Light. 12500 effective lumens (20,000 equivalent lumens). 110v AC. 125 watts. White housing. (Pole not included)	20,000 lm	12,500 lm	125W	0.625A @ 120v AC	90-277v AC	No
FT-SL-GESM-110-SW-W	Pole Mount Guardian Elite Scene Light. 12500 effective lumens (20,000 equivalent lumens). 110v AC. 125 watts. Switch. White housing. (Pole not included)	20,000 lm	12,500 lm	125W	0.625A @ 120v AC	90-277v AC	Yes

FT-SL-X-15

FT-SL-X-15

POLE MOUNTED LED SCENE LIGHT



ABOUT THE FT-SL-X-15

The FT-SL-X-15 LED Scene light is designed to be the most reliable LED scene light ever produced. This fixture has its roots in the extremely harsh global mining industry and has been adapted for use in the fire service. It produces measurable light output comparable to scene lights advertised in the fire industry as 28,000 lumens while consuming a fraction of the power (185W total). The combination of an aluminum housing, virtually unbreakable lens, integrated deutsch connector, reinforced gasketed bezel, and a strengthened trunion bracket create a one of a kind, high-powered light that will outshine and outlast the competition.

Key Features:

- Industry Standard 3/4" NPT Mount
- Designed for 60 GRMS Vibration
- AC or DC Configuration
- Anti-Corrosive Coating
- 7 Watt Cree XP-L LEDs
- CE Certified

NO AC POWER SUPPLY ON DC MODELS

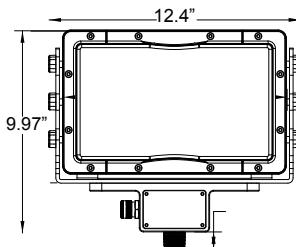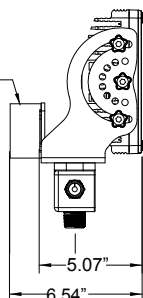

FT-SL-X-15 SPECS

RAW LUMENS	28,000
EFFECTIVE LUMENS	15,305
WATTAGE	185W
AMPERAGE	15.4 A @ 12V DC / 1.54 @ 120V AC
INPUT VOLTAGE	11-65V DC OR 90-277V AC

Model #	Description	Raw Lumens	Effective Lumens	Wattage	Voltage Range	Amp. Draw	Beam Pattern	Dimensions	Weight
FT-SL-X-15-S-B	28,000+ Equivalent Lumen Scene Light. 10 degree spot optic configuration. Black housing.	28,000	15,305	185W	11-65V DC	15.4A @ 12VDC	Spot	12.4" X 9.97" X 5.07"	19.45 lbs.
FT-SL-15-X-S-W	28,000+ Equivalent Lumen Scene Light. 10 degree spot optic configuration. White housing.	28,000	15,305	185W	11-65V DC	15.4A @ 12VDC	Spot	12.4" X 9.97" X 5.07"	19.45 lbs.
FT-SL-15-X-F-B	28,000+ Equivalent Lumen Scene Light. 60 degree flood optic configuration. Black housing.	28,000	15,305	185W	11-65V DC	15.4A @ 12VDC	Flood	12.4" X 9.97" X 5.07"	19.45 lbs.
FT-SL-15-X-F-W	28,000+ Equivalent Lumen Scene Light. 60 degree flood optic configuration. White housing.	28,000	15,305	185W	11-65V DC	15.4A @ 12VDC	Flood	12.4" X 9.97" X 5.07"	19.45 lbs.
FT-SL-15-X-FT-B	28,000+ Equivalent Lumen Scene Light. 10 and 60 degree spot and flood optic configuration. Black housing.	28,000	15,305	185W	11-65V DC	15.4A @ 12VDC	Combo	12.4" X 9.97" X 5.07"	19.45 lbs.
FT-SL-15-X-FT-W	28,000+ Equivalent Lumen Scene Light. 10 and 60 degree spot and flood optic configuration. White housing.	28,000	15,305	185W	11-65V DC	15.4A @ 12VDC	Combo	12.4" X 9.97" X 5.07"	19.45 lbs.

FT-SL-X-15

Model #	Description	Raw Lumens	Effective Lumens	Wattage	Voltage Range	Amp. Draw	Beam Pattern	Dimensions	Weight
FT-SL-X-15-S-110-B	28,000+ Equivalent Lumen Scene Light. 10 and 60 degree spot and flood optic configuration. Black housing. With flexpower module (90-277v AC)	28,000	15,305	185W	90-277V AC	1.54A @ 120VAC	Spot	12.4" X 9.97" X 6.54"	22 lbs.
FT-SL-X-15-S-110-W	28,000+ Equivalent Lumen Scene Light. 10 degree spot optic configuration. White housing. With flexpower module (90-277v AC)	28,000	15,305	185W	90-277V AC	1.54A @ 120VAC	Spot	12.4" X 9.97" X 6.54"	22 lbs.
FT-SL-X-15-F-110-B	28,000+ Equivalent Lumen Scene Light. 60 degree flood optic configuration. Black housing. With flexpower module (90-277v AC)	28,000	15,305	185W	90-277V AC	1.54A @ 120VAC	Flood	12.4" X 9.97" X 6.54"	22 lbs.
FT-SL-X-15-F-110-W	28,000+ Equivalent Lumen Scene Light. 60 degree flood optic configuration. White housing. With flexpower module (90-277v AC)	28,000	15,305	185W	90-277V AC	1.54A @ 120VAC	Flood	12.4" X 9.97" X 6.54"	22 lbs.
FT-SL-X-15-FT-110-B	28,000+ Equivalent Lumen Scene Light. 10 and 60 degree spot and flood optic configuration. Black housing. With flexpower module (90-277v AC)	28,000	15,305	185W	90-277V AC	1.54A @ 120VAC	Combo	12.4" X 9.97" X 6.54"	22 lbs.
FT-SL-X-15-FT-110-W	28,000+ Equivalent Lumen Scene Light. 10 and 60 degree spot and flood optic configuration. White housing. With flexpower module (90-277v AC)	28,000	15,305	185W	90-277V AC	1.54A @ 120VAC	Combo	12.4" X 9.97" X 6.54"	22 lbs.